

Laminate Installation Kit Contents

Laminate Installation Guide

IMPORTANT: We have taken extra steps to package the and splash, helping to ensure that it arrives free from damage. Inspect the countertop as soon as possible and prior to any tear out of existing countertop at the job site. This inspection should take place within twenty-four hours of pick up. Do not store materials outside or in locations where they may be exposed to water or high humidity. Installation of a countertop thought to be either defective or have dimensional error does not extend your warranty to include installation or reimbursement and may void your warranty. The limited warranty covers replacement or repair only. See laminate warranty on back of instruction sheet. Check all dimensions, and test-fit miter & field joints for proper fit and alignment. Any problems should be addressed now to avoid larger ones later. Take care in removing existing countertops (if necessary) so as not to damage cabinets, plumbing, or electrical wiring.

Color-Matched Caulk
Used as color match finishing caulk to seal areas where loose backplash meets the countertop or where countertop meets the wall.

Color-Matched Laminate Repair
Decorative cover-up to help blend and hide the miter seam area on the laminate countertop and also can be used to hide minor blemishes, such as scratches and chips that may occur during the life of the countertop.

Water Resistant Wood Glue
Used to attach the miters of the countertop. It's extremely important if purchasing glue off store shelf that it's water resistant wood glue (sku 485-4284) and not regular wood glue (any other glue used in attaching miters will void warranty). Do not use any type of caulk.

Additional Materials Required

- Hammer
- Marking Utensil
- Tape Measure
- Screw Gun
- Ball Sander
- Phillips - Screw Driver
- Square Drive
- Jig Saw Utility Knife
- Wrench 7/16"

Optional Installation Kit Includes

- A - Build-Up Strips
- B - Shims
- C - 1-1/4" Screws
- D - Dual Action Fastener
- J - Miter Bolts & Biscuits
- F - Water Resistant Glue
- G - Color-Matched Caulk
- H - Color-Matched Seam Fill
- I - 5mm Allen Wrench
- J - Moisture Barrier Tape



Build-up strips



Color-Matched Seam Fill



Shims




1 1/4" Screws



Color Match Caulk

Instructions

Additional - If Required

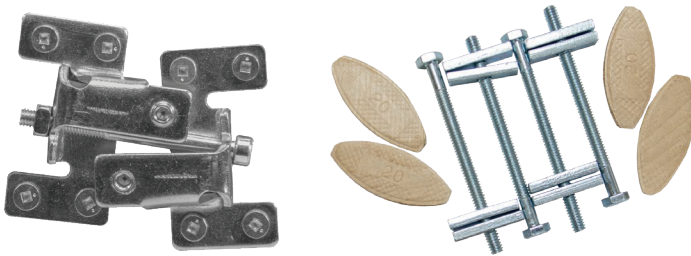

Fasteners (Either Dual Action Fasteners or Miter Bolts and Biscuits)



5mm Allen Wrench (Dual Action Fasteners Only)



Moisture Barrier Tape



Water Resistant Glue